PRODUCT INFORMATION


Description	12-24V DOT/ECE RHT LED High & Low Beam Headlight with Front Position	
Height	90.00 mm / 3.54 in	40
Width	90.00 mm / 3.54 in	
Depth	126.00 mm / 4.96 in	
Shape	Round	
Outer Lens Material	Polycarbonate	
Outer Lens Color	Clear	
Housing Material	Aluminum	
Housing Color	Black	
Minimum Operating Temperature	-40 °C / -40 °F	- Contraction of the second seco
Maximum Operating Temperature	65 °C / 149 °F	
Mating Connector	DEUTSCH DT06-6S	
Product Weight	1.18 lbs / 0.54 kgs	MODEL
Shipping Weight	1.33 lbs / 0.6 kgs	
Additional Information	3-point Mount for 1.5mm Mounting Frame and 3-point Mount for 3mm Mounting Frame is applicable for	

• All Model 93 Lighting Options


LAMP IS NOT SUPPLIED WITH A HARNES



PRODUCT DIMENSIONS

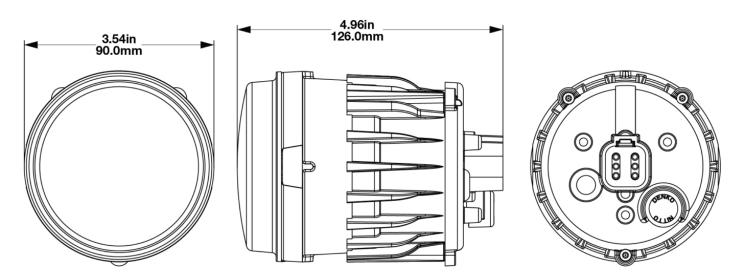

Pin Out Diagram & Wiring Information





ELECTRICAL SPECIFICATIONS

Input Voltage	12-24V DC
Operating Voltage	9-30V DC
Transient Spike Protection	150V Peak @ 1 HZ-100 Pulses
Pin 1 Wire	Low Beam
Pin 2 Wire	Front Position
Pin 3 Wire	N/A
Pin 4 Wire	N/A
Pin 5 Wire	Ground
Pin 6 Wire	High Beam
Current Draw	1.13A @ 12V DC (Low Beam) 1.45A @ 12V DC (High Beam) 0.111A @ 12V DC (Front Position) 0.701A @ 24V DC (Low Beam) 1.03A @ 24V DC (High Beam) 0.071A @ 24V DC (Front Position)

REGULATORY STANDARDS COMPLIANCE



ECE Reg 10 ECE Reg 149 - HC FMVSS 108 s10.1 (Table XIX) ECE Reg 148 - A ECE Reg 149 - HR FMVSS 108 s10.1 (Table XVIII)





PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	2650(High Beam), 1750(Low Beam)	Asymmetric High Beam (0.75m high at 0°) 150m
Effective Lumen Output	790(High Beam), 650(Low Beam)	10+ Lux 75m
Candela Output	44,000(High Beam), 23,000(Low Beam)	1 Lux Om
Nominal LED Color Temperature	5665 K	0.25 Lux 75m
Beam Pattern(s)	Forward Lighting - Driving Forward Lighting - High Beam (DOT/ECE) Forward Lighting - Low Beam (ECE Right Hand) Forward Lighting - Low Beam (DOT/ECE) Signalization - Front Position	150m 125m 250m 375m 125m 250m 375m Asymmetric Low Beam (0.75m high at 0°) 75m 38m 1 Lux 0m 0.25 Lux 38m 75m 50m 100m 50m 100m 200m

APPLICATIONS









PRODUCT WARNINGS

For California residents: ▲ WARNING: Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>. ▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - <u>www.P65Warnings.ca.gov</u>.

ACCESSORIES



Part Number 3271981 5 Function Wire Assembly for Model 93



Part Number 3272001 SAE/DOT Motorcycle Wire Assembly without DI/DRL for Model 93



Part Number 3272011 ECE Motorcycle Wire Assembly without DI for Model 93



Part Number 8001461 90mm Light 3-Point Mount for 1.5mm Mounting Frame



Part Number 8001471 90mm Light 3-Point Mount for 3mm Mounting Frame



Part Number 8001601 Pedestal Mounting Bracket for Model 93 Single Lamp



Part Number 8001621 Pedestal Mounting Bracket for Model 93 Double Lamp



Part Number 8201021 90mm 3-Point Lock Mount for 3mm Mounting Frame



RELATED PRODUCTS



Part Number 0347941 12-24V SAE/ECE LED Turn Signal with DRL Function



Part Number 0530101 12-24V ECE LHT LED High & Low Beam Headlight with Front Position



Part Number 0553071 12-24V DOT/ECE LED High Beam Headlight



Part Number 0553081 12-24V DOT/ECE Symmetric LED Low Beam Headlight



Part Number 0553091 12-24V ECE LHT LED Low Beam Headlight



Part Number 0553101 12-24V DOT/ECE RHT LED Low Beam Headlight



Part Number 0554381 12-24V DOT/ECE LED High Beam Headlight with Front Position

Part Number 0556701 12-24V SAE/ECE LED Fog Light

