PRODUCT INFORMATION

Description 12-24V DOT/ECE LED High Beam

Headlight with Front Position

 Height
 90.00 mm / 3.54 in

 Width
 90.00 mm / 3.54 in

 Depth
 95.00 mm / 3.74 in

Shape Round

Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Die-Cast Aluminum

Housing ColorBlackBezel ColorBlack

Minimum Operating $-40~^{\circ}\text{C} / -40~^{\circ}\text{F}$

Temperature

Maximum Operating $65 \, ^{\circ}\text{C} \, / \, 149 \, ^{\circ}\text{F}$


Temperature

Connector or WiringDeutsch DT04-3PMating ConnectorDeutsch DT06-3SProduct Weight1.22 lbs / 0.55 kgsShipping Weight1.44 lbs / 0.65 kgs





PRODUCT DIMENSIONS

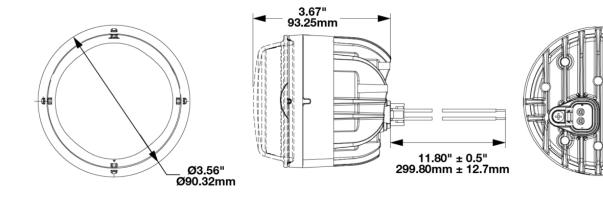



ELECTRICAL SPECIFICATIONS

Input Voltage 12-24V DC Operating Voltage 10-31V DC

Transient Spike Protection 150V Peak @ 1 HZ-100 Pulses

Black Wire Ground
White Wire High Beam
Yellow Wire Front Position

Current Draw 0.80A @ 12V DC (High Beam)

0.40A @ 24V DC (High Beam) 0.40A @ 12V DC (Front Position) 0.20A @ 24V DC (Front Position)

REGULATORY STANDARDS COMPLIANCE













Buy America Standards ECE Reg 10 ECE Reg 112 ECE Reg 7

Eco Friendly FMVSS 108 s10.1 (Table XVIII)

IEC IP69K

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 630 Effective Lumen 230

Output


Candela Output 45,000 **Nominal LED Color** 5000 K


Temperature

Beam Pattern(s) Forward Lighting - High Beam

(DOT/ECE)

Signalization - Front Position

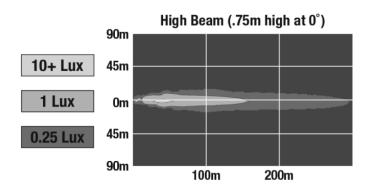





APPLICATIONS

















ADDITIONAL INFORMATION

This is a single light, including (1) lamp and mounting hardware.

Headlight must be securely mounted and properly aimed such that the beam pattern cut off line complies with all applicable regulations. If you are not familiar with the legal requirements for aiming your headlights, please see a professional service provider. We recommend that headlights are aimed with a headlight aiming system for proper alignment.

This is an FMVSS UB6 high beam. It requires that the low beam is powered at the same time as the high beam to be compliant for use on the road.

3-point Mount for 1.5mm Mounting Frame is applicable for

- PN 0554381
- PN 0553071
- PN 0553091
- PN 0553101
- PN 0553081
- PN 0556701
- PN 0347941

3-point Mount for 3mm Mounting Frame is applicable for

• All Model 93 Lighting Options

PRODUCT WARNINGS

For California residents:

WARNING: Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>.

▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.



ACCESSORIES



Part Number 3271981 5 Function Wire Assembly for Model 93



Part Number 3272001 SAE/DOT Motorcycle Wire Assembly without Assembly without DI DI/DRL for Model 93



Part Number 3272011 ECE Motorcycle Wire for Model 93



Part Number 8001461 90mm Light 3-Point Mount for 1.5mm Mounting Frame



Part Number 8001471 90mm Light 3-Point Mount for 3mm Mounting Frame



Part Number 8001601 Pedestal Mounting Bracket for Model 93 Single Lamp



Part Number 8001621 **Pedestal Mounting** Bracket for Model 93 Double Lamp



Part Number 8201021 90mm 3-Point Lock Mount for 3mm Mounting Frame

RELATED PRODUCTS



Part Number 0347941 12-24V SAE/ECE LED Turn Signal with DRL Function



Part Number 0530091 12-24V DOT/ECE RHT LED High & Low Beam Headlight with Front Position



Part Number 0530101 12-24V ECE LHT LED High & Low Beam Headlight with Front Position



Part Number 0553071 12-24V DOT/ECE LED High Beam Headlight



Part Number 0553081 12-24V DOT/ECE Symmetric LED Low Beam Headlight



Part Number 0553091 12-24V ECE LHT LED Low Beam Headlight



Part Number 0553101 12-24V DOT/ECE RHT LED Low Beam Headlight



Part Number 0556701 12-24V SAE/ECE LED Fog Light