

Adaptive LED Headlights – Model 8791 Adaptive 2

PRODUCT INFORMATION

| | |
|--------------------------------------|---|
| Description | 12V DOT/ECE LED High and Low Beam Adaptive Pedestal Headlight with Chrome Inner Bezel |
| Height | 180.00 mm / 7.09 in |
| Width | 180.00 mm / 7.09 in |
| Depth | 94.00 mm / 3.7 in |
| Shape | Round |
| Outer Lens Material | Polycarbonate |
| Outer Lens Color | Clear |
| Housing Material | Aluminum |
| Housing Color | Black |
| Bezel Color | Chrome |
| Mounting Hardware Description | 0.75" Pedestal |
| Retrofits | Pedestal 7" Round Headlights (PAR56) |
| Minimum Operating Temperature | -40 °C / -40 °F |
| Maximum Operating Temperature | 65 °C / 149 °F |
| Connector or Wiring | Bare Leads |
| Product Weight | 3.92 lbs / 1.78 kgs |
| Shipping Weight | 3.92 lbs / 1.78 kgs |




Print date: 2025-01-09

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER 
 Engineered. Lighting. Solutions.

Adaptive LED Headlights – Model 8791 Adaptive 2

PRODUCT DIMENSIONS

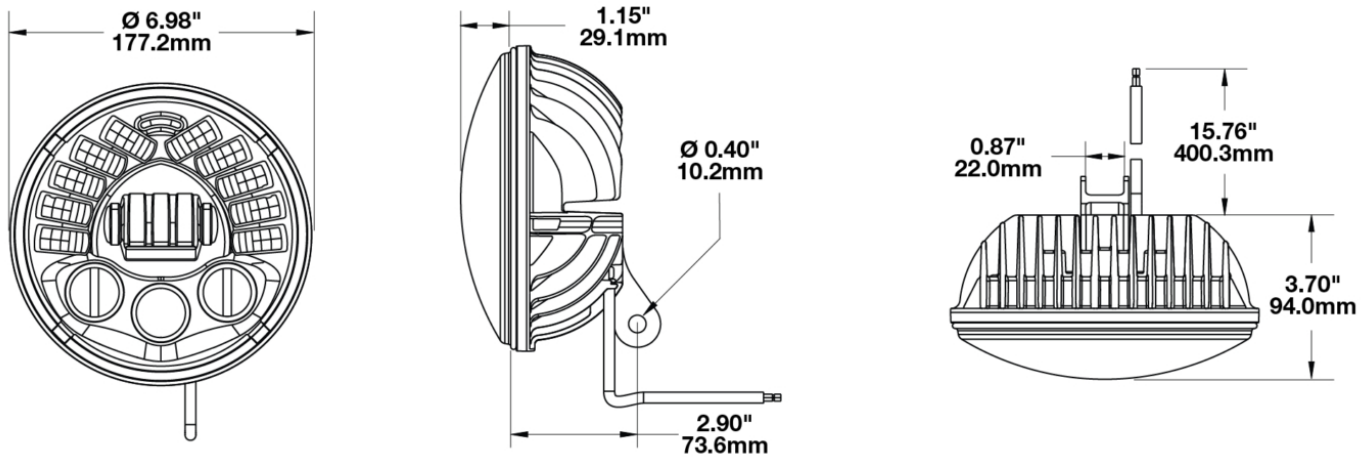

ELECTRICAL SPECIFICATIONS

| | |
|-----------------------------------|--|
| Input Voltage | 12V DC |
| Operating Voltage | 9-16V DC |
| Transient Spike Protection | 150V Peak @ 1 HZ-100 Pulses |
| Black Wire | Ground |
| White Wire | High Beam |
| Yellow Wire | Low Beam |
| Red Wire | Front Position |
| Current Draw | 2.9A @ 13.5V DC (High Beam) 1.9A @ 13.5V DC (Low Beam) 0.092A @ 13.5V DC (Front Position) 3.5A @ 13.5V DC (Low Beam at Full Lean) 4.5A @ 13.5V DC (High Beam at Full Lean) |

Print date: 2025-01-09

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

Adaptive LED Headlights – Model 8791 Adaptive 2


REGULATORY STANDARDS COMPLIANCE



| | |
|--|--------------|
| Buy America Standards | ECE Reg 113 |
| ECE Reg 50 | Eco Friendly |
| FMVSS 108 s10.1 (Table XX) | IEC IP67 |
| Tested to ECE Reg. 10 (Radiated Emissions only) | |

PHOTOMETRIC SPECIFICATIONS

| | |
|--------------------------------------|---|
| Raw Lumen Output | 2,250 (High Beam); 2025 (Low Beam) |
| Effective Lumen Output | 1,150 (High Beam); 850 (Low Beam) |
| Candela Output | 48,000 (High Beam); 11,500 (Low Beam) |
| Nominal LED Color Temperature | 5000 K |
| Beam Pattern(s) | Forward Lighting - High Beam (DOT/ECE) Forward Lighting - Low Beam (DOT/ECE) Signalization - Front Position |

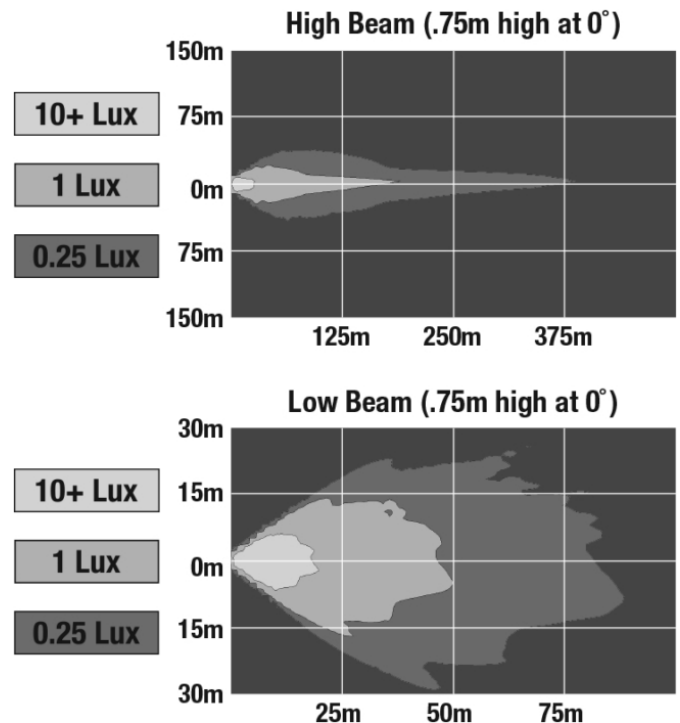

Print date: 2025-01-09

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

Adaptive LED Headlights – Model 8791 Adaptive 2

APPLICATIONS



ADDITIONAL INFORMATION

Improvements over the original Adaptive Series

The NEW Adaptive 2 Series headlights have been improved to feature Adaptive technology when using the high beam, in addition to the low beam. Providing ditch-to-ditch lighting to eliminate dark corners on sharp turns and a punch of light 1,500 feet down the road to give you a safer and more confident ride.

Red Wire

Note about Front Position: The front position light is a requirement outside the United States. **If your bike is operated in the United States you do NOT need to connect this wire (red)** unless your bike is equipped with a front position light.

PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

RELATED PRODUCTS



Part Number

0555071

12V DOT/ECE LED
High and Low Beam
Adaptive Pedestal
Headlight with Black
Inner Bezel

Print date: 2025-01-09

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER 
Engineered. Lighting. Solutions.