LED Compact Work Light - Model 792

PRODUCT INFORMATION

Description 36-80V LED Compact Work Light with

Panel Mount

 Height
 82.06 mm / 3.23 in

 Width
 98.80 mm / 3.89 in

 Depth
 43.40 mm / 1.71 in

Shape Rectangular

Outer Lens Material Polycarbonate

Outer Lens ColorClearHousing MaterialAluminumHousing ColorBlackMounting TypePanel

Minimum Operating -40 °C / -40 °F

Temperature

Maximum Operating $65 \, ^{\circ}\text{C} \, / \, 149 \, ^{\circ}\text{F}$

Temperature

Mating Connector JAE Connector MX19A003S51 harness


included with flying leads


Product Weight 0.40 lbs / 0.18 kgs Shipping Weight 7.19 lbs / 3.26 kgs






PRODUCT DIMENSIONS









LED Compact Work Light - Model 792

ELECTRICAL SPECIFICATIONS

Input Voltage36-80V DCOperating Voltage30-95V DC

Transient Spike Protection 330V Peak @ 1 HZ-100 Pulses

Red Wire Power
Black Wire Ground

Current Draw 0.75A @ 36V DC (Power)

0.56A @ 48V DC (Power) 0.34A @ 80V DC (Power)

REGULATORY STANDARDS COMPLIANCE











Buy America Standards ECE Reg 10 Eco Friendly IEC IP67

IEC IP69K Tested to ECE Reg. 10 (Radiated Emissions only)


PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 3630 **Effective Lumen** 2000

Output

Candela Output 2900 **Nominal LED Color** 5050 K

Temperature

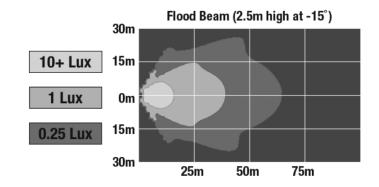

LED Compact Work Light - Model 792

APPLICATIONS

















PRODUCT WARNINGS

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

RELATED PRODUCTS



Part Number 1603921 12-24V LED Compact Work Light with Pedestal Mount



Part Number 1603931 36-80V LED Compact Work Light with Pedestal Mount



Part Number 1603932 36-90V LED Compact Work Light with Pedestal Mount (BULK with Harness)



Part Number 1603951 12-24V LED Compact Work Light with Panel Mount