PRODUCT INFORMATION

Description 12-24V LED Backup & Work Light with

Flood Beam Pattern

Height 52.12 mm / 2.05 in Width 274.50 mm / 10.81 in Depth 14.14 mm / 0.56 in

Stylized **Shape Outer Lens Material** Acrylic **Outer Lens Color** Clear PC/ABS **Housing Material Housing Color** Black

-40 °C / -40 °F **Minimum Operating**

Temperature

Maximum Operating 85 °C / 185 °F

Temperature


Connector or Wiring 4-Pin Integrated connector JAE


MX19/MX19A Series

Mating Connector JAE MX19004S51 **Product Weight** 0.41 lbs / 0.19 kgs



PRODUCT DIMENSIONS





ELECTRICAL SPECIFICATIONS

Input Voltage12-24V DCOperating Voltage9-32V DCRed WireWorkWhite WireBackupBlack WireGround

Current Draw 1.24A @ 12V DC (Worklamp)

0.17A @ 12V DC (Backup) 0.60A @ 24V DC (Worklamp) 0.19A @ 24V DC (Backup)

REGULATORY STANDARDS COMPLIANCE





ECE Reg 23 IEC IP67

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 2800 Effective Lumen 1160


Output

Candela Output 770 **Nominal LED Color** 4750 K

Temperature

Beam Pattern(s) Forward Lighting - Flood

(Standard)

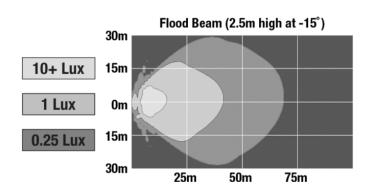



APPLICATIONS













PRODUCT WARNINGS

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

ACCESSORIES





Part Number 8200921

Pedestal Mount for Model 260 SAE and 905

Part Number 8200931

Panel Mount for Model 260 SAE and 905



RELATED PRODUCTS





Part Number 1000161

12-24V LED Work Light 12-24V LED Work Light with Flood Beam Pattern

Part Number 1000171

with Flood Beam Pattern & Diffused Lens

