

LED Work Light - Model 529

PRODUCT INFORMATION

Description	12-24V LED Super Wide Auxiliary Light
Height	59.50 mm / 2.34 in
Width	473.50 mm / 18.64 in
Depth	54.50 mm / 2.15 in
Shape	Rectangular
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Aluminum
Housing Color	Black
Bezel Color	Black
Mounting Hardware Description	(x1) M8-1.25 x 25mm SS Carriage Bolt
Mounting Type	Pedestal
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	Deutsch DT04-3P
Mating Connector	Deutsch DT06-3S
Product Weight	2.85 lbs / 1.29 kgs
Shipping Weight	3.59 lbs / 1.63 kgs




Print date: 2024-12-26

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER 
Engineered. Lighting. Solutions.

LED Work Light - Model 529

PRODUCT DIMENSIONS

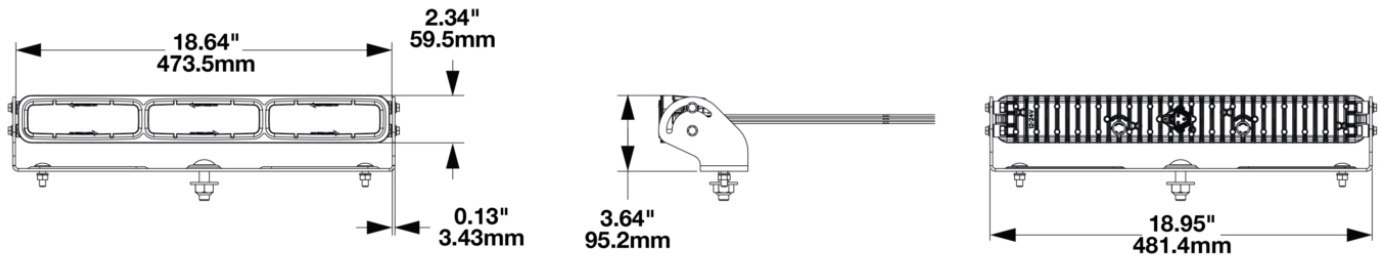

ELECTRICAL SPECIFICATIONS

Input Voltage	12-24V DC
Operating Voltage	9-33V DC
Transient Spike Protection	330V Peak @ 1 HZ-100 Pulses
Yellow Wire	Steady State On
White Wire	Flash 1 Hz
Black Wire	Ground
Current Draw	3.90A @ 12V DC (Steady On) 3.90A @ 12V DC (Flashing) 2.90A @ 24V DC (Steady On) 2.90A @ 24V DC (Flashing)

Print date: 2024-12-26

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Work Light - Model 529

REGULATORY STANDARDS COMPLIANCE




IEC IP67

IEC IP69K

Tested to ECE Reg. 10
(Radiated Emissions only)

PHOTOMETRIC SPECIFICATIONS

Effective Lumen Output	1506
Nominal LED Color Temperature	5700 K
Beam Pattern(s)	Forward Lighting - Flood (Super Wide) Warning - Flashing Warning
Flash Rate 1	1 Flash/Second

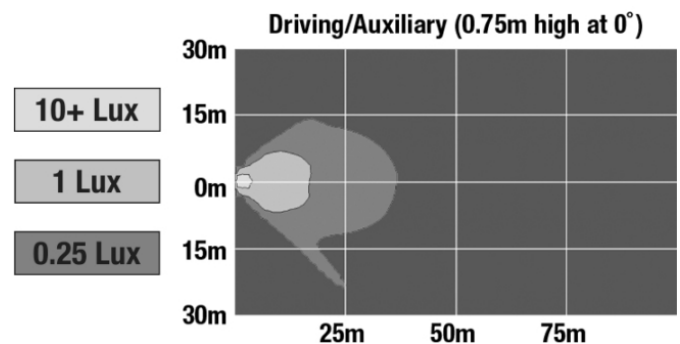

PRODUCT WARNINGS

For California residents:

⚠ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

Print date: 2024-12-26

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660