

# LED Work Lights & Turn Signal Lights - Model 775 XD

## PRODUCT INFORMATION

---

<b>Description</b>	12-48V Amber Clear LED Work Light with Spot Beam and Turn Signal
<b>Height</b>	180.46 mm / 7.1 in
<b>Width</b>	99.68 mm / 3.92 in
<b>Depth</b>	59.76 mm / 2.35 in
<b>Shape</b>	Oval
<b>Outer Lens Material</b>	Polycarbonate
<b>Outer Lens Color</b>	Clear
<b>Housing Material</b>	Polycarbonate
<b>Housing Color</b>	Black
<b>Mounting Hardware Description</b>	(x1) 5/16"-18 x 1.00" Mounting Bolt
<b>Mounting Type</b>	Universal Pedestal Mount
<b>Minimum Operating Temperature</b>	-40 °C / -40 °F
<b>Maximum Operating Temperature</b>	65 °C / 149 °F
<b>Connector or Wiring</b>	4-Pin Deutsch Weather-Proof Plug (DT06-4S)
<b>Product Weight</b>	0.60 lbs / 0.27 kgs
<b>Shipping Weight</b>	4.32 lbs / 1.96 kgs



---

**Print date: 2024-12-24**


© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**   
*Engineered. Lighting. Solutions.*

# LED Work Lights & Turn Signal Lights - Model 775 XD

## PRODUCT DIMENSIONS

---

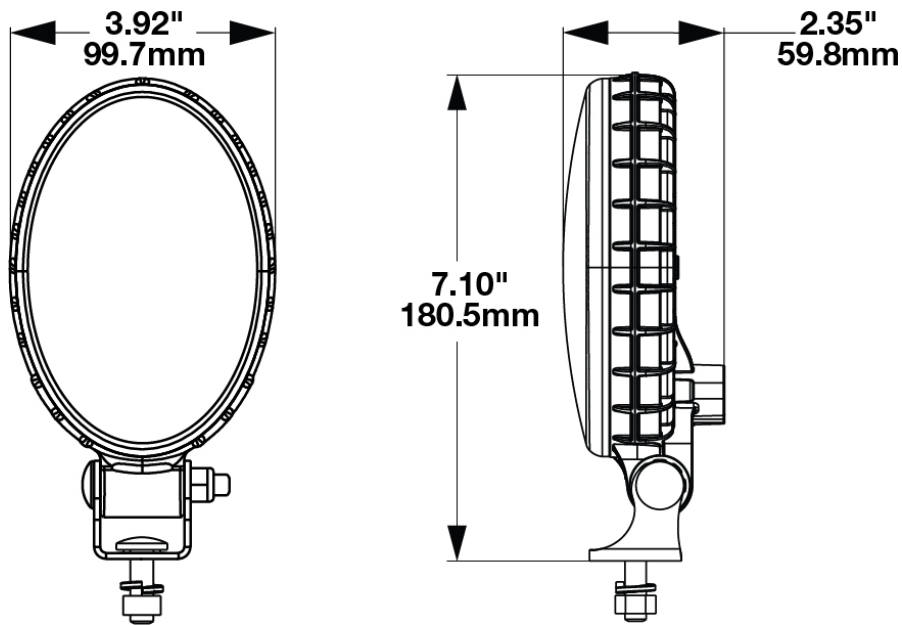

---

Print date: 2024-12-24

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

# LED Work Lights & Turn Signal Lights - Model 775 XD

## ELECTRICAL SPECIFICATIONS

<b>Input Voltage</b>	12-48V DC
<b>Operating Voltage</b>	9-60V DC
<b>Transient Spike Protection</b>	330V Peak @ 1 HZ-100 Pulses
<b>pin 4 Wire</b>	Ground
<b>pin 2 Wire</b>	Worklight
<b>pin 1 Wire</b>	Park/Tail
<b>pin 3 Wire</b>	Turn
<b>Current Draw</b>	1.25A @ 12V DC (Worklamp) 0.180A @ 12V DC (Turn) 0.015A @ 12V DC (Park) 0.560A @ 24V DC (Worklamp) 0.100A @ 24V DC (Turn) 0.010A @ 24V DC (Park) 0.390A @ 36V DC (Worklamp) 0.080A @ 36V DC (Turn) 0.010A @ 36V DC (Park) 0.300A @ 48V DC (Worklamp) 0.070A @ 48V DC (Turn) 0.010A @ 48V DC (Park)

## REGULATORY STANDARDS COMPLIANCE



Buy America Standards  
Eco Friendly

ECE Reg 6  
IEC IP67

**Print date: 2024-12-24**


© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**  
Engineered. Lighting. Solutions.

# LED Work Lights & Turn Signal Lights - Model 775 XD

## PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	1100
Effective Lumen Output	620
Nominal LED Color Temperature	5000 K
Beam Pattern(s)	Forward Lighting - Spot

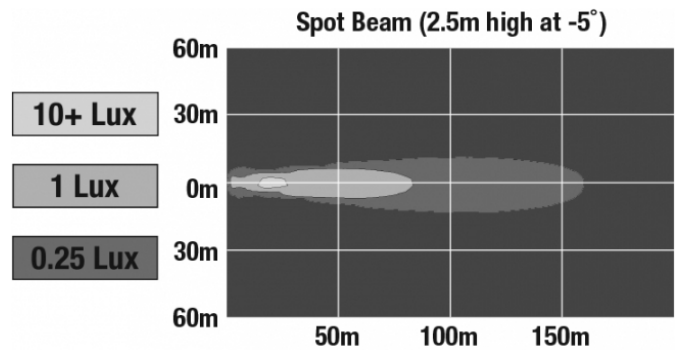

## APPLICATIONS



## PRODUCT WARNINGS

For California residents:

⚠️ **WARNING:** Cancer and reproductive harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

⚠️ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Print date: 2024-12-24

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.  
[www.jwspeaker.com](http://www.jwspeaker.com) • [speaker@jwspeaker.com](mailto:speaker@jwspeaker.com) • 262.251.6660

**J.W. SPEAKER**  
 Engineered. Lighting. Solutions.

# LED Work Lights & Turn Signal Lights - Model 775 XD

## ACCESSORIES

---



**Part Number**  
**8200011**  
Magnet Mount Kit for  
XD Series Work Lights



**Part Number**  
**8200101**  
Stainless Steel  
Mounting Kit for Work  
Lights & Marine Lights