

# LED Work Light - Model 526

## PRODUCT INFORMATION

<b>Description</b>	24V LED Work Light with Black Housing, Polycarbonate Lens & Dual White Anti-Glare Pattern
<b>Height</b>	160.47 mm / 6.32 in
<b>Width</b>	158.00 mm / 6.22 in
<b>Depth</b>	98.00 mm / 3.86 in
<b>Shape</b>	Square
<b>Outer Lens Material</b>	Polycarbonate
<b>Outer Lens Color</b>	Clear
<b>Housing Material</b>	Die-Cast Aluminum
<b>Housing Color</b>	Black
<b>Mounting Hardware Description</b>	(x1) M10-1.5 x 40mm Mounting Bolt
<b>Mounting Type</b>	Universal Pedestal Mount
<b>Minimum Operating Temperature</b>	-40 °C / -40 °F
<b>Maximum Operating Temperature</b>	65 °C / 149 °F
<b>Connector or Wiring</b>	iCONN connector - IMate23 3 wire
<b>Product Weight</b>	4.60 lbs / 2.09 kgs
<b>Shipping Weight</b>	4.88 lbs / 2.21 kgs
<b>Additional Information</b>	Warm/Cool White Color Temperatures: Warm White: 2800K Cool White: 5000K




Print date: 2024-12-31

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**   
Engineered. Lighting. Solutions.

# LED Work Light - Model 526

## PRODUCT DIMENSIONS

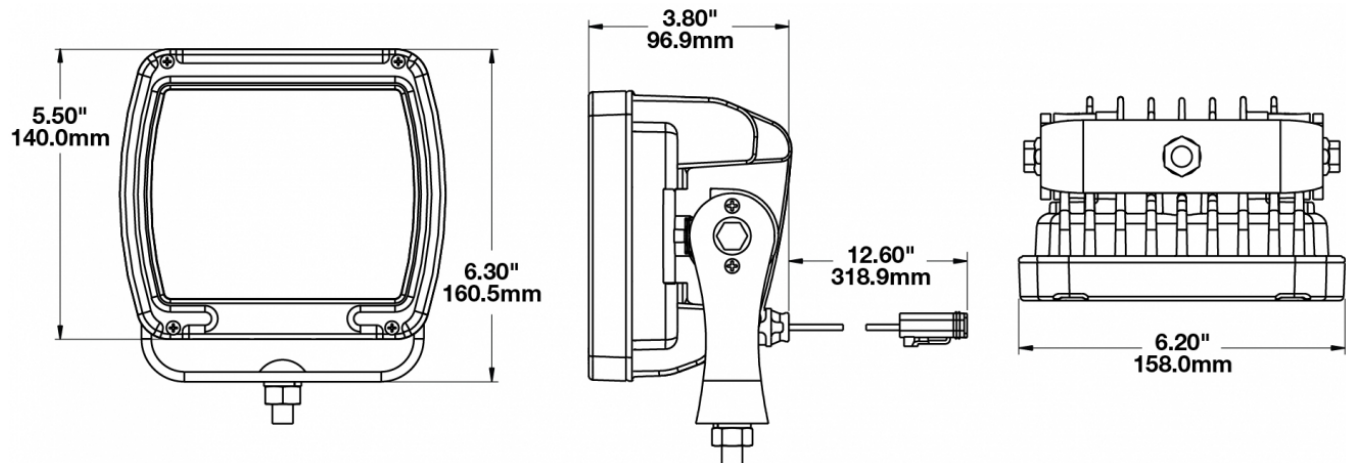

## ELECTRICAL SPECIFICATIONS

<b>Input Voltage</b>	24V DC
<b>Operating Voltage</b>	16-32V DC
<b>Transient Spike Protection</b>	330V Peak @ 1 HZ-100 Pulses
<b>White Wire</b>	Cool White
<b>Black Wire</b>	Ground
<b>Green Wire</b>	Warm White
<b>Current Draw</b>	3.25A @ 24V DC (Warm White) 3.25A @ 24V DC (Cool White)

## REGULATORY STANDARDS COMPLIANCE



IEC IP69K

Tested to ECE Reg. 10  
(Radiated Emissions only)

Print date: 2024-12-31

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**  
Engineered. Lighting. Solutions.

# LED Work Light - Model 526

## PHOTOMETRIC SPECIFICATIONS

<b>Raw Lumen Output</b>	(warm) 7500, (cool) 9900
<b>Effective Lumen Output</b>	(warm) 3390, (cool) 3464
<b>Candela Output</b>	(warm) 4508, (cool) 4488
<b>Beam Pattern(s)</b>	Forward Lighting - Dual Beam

## APPLICATIONS



## PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

## ACCESSORIES



**Part Number**  
**3267541**  
12" 18AWG iCONN  
iMATE 23 Wire Asm  
w/DT04-2P



**Part Number**  
**3268191**  
15M 18AWG iCONN  
iMATE 23 Wire Asm  
w/DT04-2P



**Part Number**  
**3268201**  
2.5M 18AWG iCONN  
iMATE 23 Wire Asm  
w/DT04-2P

Print date: 2024-12-31

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.  
[www.jwspeaker.com](http://www.jwspeaker.com) • [speaker@jwspeaker.com](mailto:speaker@jwspeaker.com) • 262.251.6660

# LED Work Light - Model 526

## RELATED PRODUCTS

---



**Part Number**  
**1300571**  
24V LED Work Light  
with Yellow Housing,  
Polycarbonate Lens &  
Dual White Anti-Glare  
Pattern



**Part Number**  
**1300581**  
24V LED Work Light  
with Black Housing,  
Polycarbonate Lens &  
Flood Beam Pattern



**Part Number**  
**1300591**  
24V LED Work Light  
with Black Housing,  
Polycarbonate Lens &  
Trapezoid Beam  
Pattern



**Part Number**  
**1300601**  
24V Anti-Glare Beam  
Pattern w/  
Polycarbonate Lens



**Part Number**  
**1300701**  
12V LED Work Light  
with Black Housing,  
Polycarbonate Lens &  
Spot Beam Pattern



**Part Number**  
**1300721**  
12V LED Work Light  
with Black Housing,  
Polycarbonate Lens &  
Flood Beam Pattern



**Part Number**  
**1300761**  
12V LED Work Light  
with Black Housing,  
Polycarbonate Lens &  
Dual White Anti-Glare  
Pattern