PRODUCT INFORMATION

Description 12-24V LED Work Light with Trapezoid

Beam Pattern

 Height
 193.80 mm / 7.63 in

 Width
 157.23 mm / 6.19 in

 Depth
 65.28 mm / 2.57 in

Shape Round

Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Polycarbonate

Housing Color Black

Mounting Hardware (x1) 3/8-16 x 1.5" Mounting Bolt

Description

Mounting Type Universal Pedestal Mount

Minimum Operating $-40 \, ^{\circ}\text{C} \, / \, -40 \, ^{\circ}\text{F}$

Temperature

Maximum Operating $65 \, ^{\circ}\text{C} \, / \, 149 \, ^{\circ}\text{F}$

Temperature

Connector or Wiring Integrated 2-Pin Deutsch Weather-Proof

Socket (DT04-2P)

Mating Connector 2-Pin Deutsch Weather-Proof Plug


(DT06-2S)

Product Weight 1.52 lbs / 0.69 kgs Shipping Weight 1.40 lbs / 0.64 kgs





PRODUCT DIMENSIONS

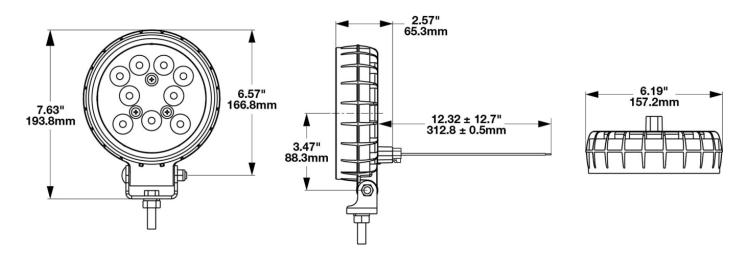

ELECTRICAL SPECIFICATIONS

Input Voltage 12-24V DC Operating Voltage 10-32V DC

Transient Spike Protection 330V Peak @ 1 HZ-100 Pulses

Red Wire Positive
Black Wire Negative
Current Draw 2A @ 12V DC
1A @ 24V DC

REGULATORY STANDARDS COMPLIANCE










Buy America Standards CISPR 12
CISPR 22 Eco Friendly
IEC IP69K SAE J1113-13

Tested to ECE Reg. 10 (Radiated Emissions only)



PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 2,385 **Effective Lumen** 1,270


Output

Nominal LED Color

Temperature

Beam Pattern(s) Forward Lighting - Trapezoid

5000 K

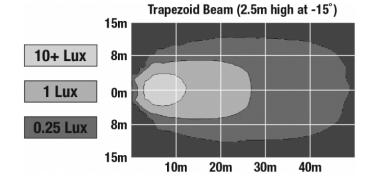

APPLICATIONS





















PRODUCT WARNINGS

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.



ACCESSORIES



Part Number 8200011 Magnet Mount Kit for **XD Series Work Lights**



Part Number 8200101 Stainless Steel Mounting Kit for Work Lights & Marine Lights



Part Number 8200491 Mounting Kit For Work Lights

RELATED PRODUCTS



Part Number 1501641 with Flood Beam Pattern



Part Number 1501661 12-24V LED Work Light 12-24V LED Work Light with Spot Beam Pattern

www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660