PRODUCT INFORMATION

Description
Height
Width
Depth
Shape
Outer Lens Material
Outer Lens Color
Housing Material
Housing Color
Mounting Hardware Description
Mounting Type
Minimum Operating Temperature
Maximum Operating Temperature
Connector or Wiring
Mating Connector
Product Weight
Shipping Weight

12-24V LED Work Light with Spot Beam Pattern 137.16 mm / 5.4 in 144.27 mm / 5.68 in 66.04 mm / 2.6 in Oval Polycarbonate Clear **Die-Cast Aluminum** Black (x1) 5/16"-18 x 0.58" Mounting Bolt Universal Pedestal Mount -40 °C / -40 °F 65 °C / 149 °F Integrated 2-Pin Deutsch Weather-Proof Socket (DT04-2P) 2-Pin Deutsch Weather-Proof Plug (DT06-2S)


1.87 lbs / 0.85 kgs 1.87 lbs / 0.85 kgs







PRODUCT DIMENSIONS

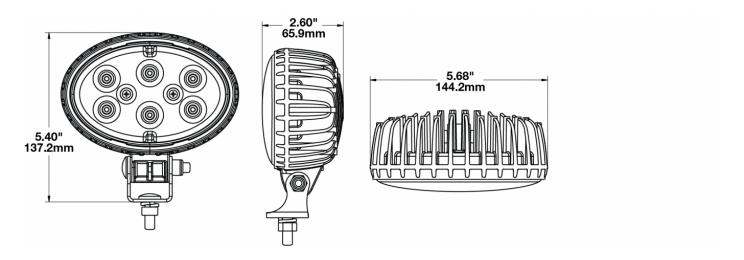

ELECTRICAL SPECIFICATIONS

Input Voltage	12-24V DC
Operating Voltage	10-36V DC
Red Wire	Positive
Black Wire	Negative
Current Draw	3.50A @ 12V DC 1.75A @ 24V DC

REGULATORY STANDARDS COMPLIANCE




Buy America Standards IEC IP69K Eco Friendly





PHOTOMETRIC SPECIFICATIONS

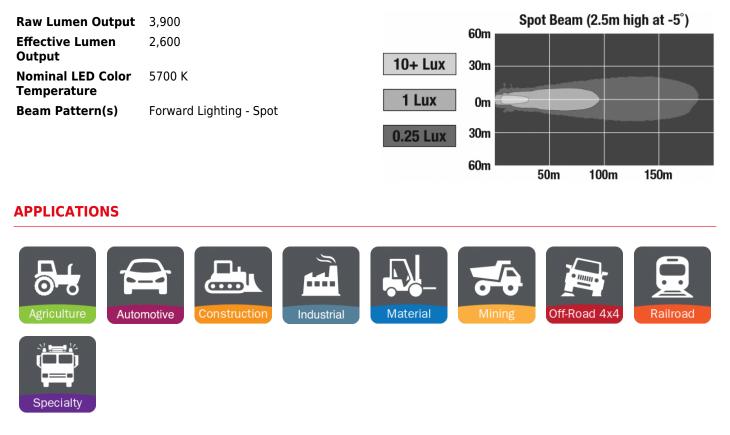

PRODUCT WARNINGS

For California residents:

WARNING: Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.



RELATED PRODUCTS



Part Number 1706581 with Trapezoid Beam Pattern



Part Number 1706591 12-24V LED Work Light with Flood Beam Pattern



Part Number 1706801 with Amber Lens & Trapezoid Beam Pattern



Part Number 1706811 with Trapezoid Beam Pattern & PE12015792 Connector



Part Number 1706821 with Spot Beam Pattern & PE12015792 Connector



Part Number 1707031

with Flood Beam Pattern & PE12015792 Connector - No Sleeve



Part Number 1707041

with Trapezoid Beam Pattern & PE12015792 Connector - No Sleeve



Part Number 1707051 12-24V LED Work Light 12-24V LED Work Light 12-24V LED Work Light with Spot Beam

Pattern & PE12015792 Connector - No Sleeve

