LED Work Lights - Model 736

PRODUCT INFORMATION

|	
Description	12V LED Work Light with Vertical Flood Beam Pattern
Height	192.79 mm / 7.59 in
Width	99.57 mm / 3.92 in
Depth	89.41 mm / 3.52 in
Shape	Oval
Outer Lens Material	Glass
Outer Lens Color	Clear
Housing Material	Die-Cast Aluminum
Housing Color	Black
Mounting Hardware Description	(x1) 5/6"-18 x 0.58" Mounting Bolt
Mounting Type	Universal Pedestal Mount
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	Integrated 2-Pin Deutsch Weather-Proof Socket (DT04-2P)
Mating Connector	2-Pin Deutsch Weather-Proof Plug (DT06-2S)
Product Weight	2.20 lbs / 1 kgs
Shipping Weight	1.40 lbs / 0.64 kgs

LED Work Lights - Model 736

PRODUCT DIMENSIONS
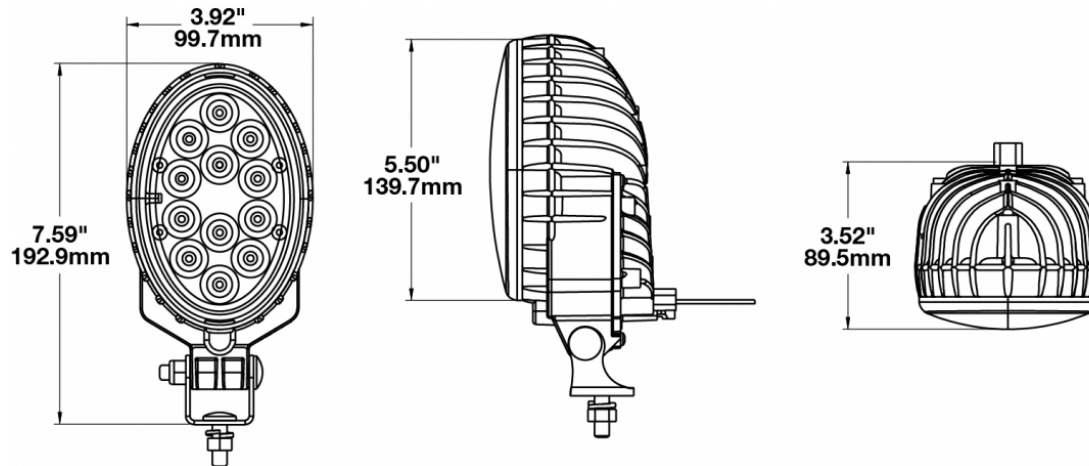
ELECTRICAL SPECIFICATIONS

Input Voltage	12V DC
Operating Voltage	9-16V DC
Transient Spike Protection	150V Peak @ 1 HZ-100 Pulses
Red Wire	Positive
Black Wire	Negative
Current Draw	3.7A @ 12V DC

REGULATORY STANDARDS COMPLIANCE

Buy America Standards

Eco Friendly

IEC IP67

SAE J575

LED Work Lights - Model 736

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	2,700
Effective Lumen Output	1,400
Nominal LED Color Temperature	5000 K
Beam Pattern(s)	Forward Lighting - Flood (Vertical)

Flood/Vertical Flood Beam (2.5m high at -15°)

APPLICATIONS

Agriculture | Construction | Industrial | Material | Mining | Railroad | Specialty
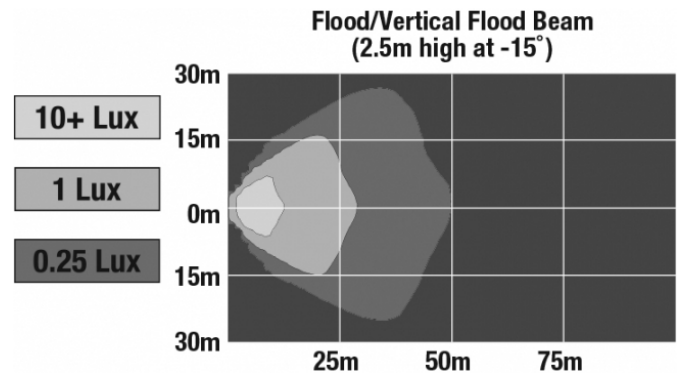
PRODUCT WARNINGS

For California residents:
⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.
⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

ACCESSORIES

Part Number 8200011
Magnet Mount Kit for XD Series Work Lights

Part Number 8200101
Stainless Steel Mounting Kit for Work Lights & Marine Lights

J.W. SPEAKER
Engineered. Lighting. Solutions.