PRODUCT INFORMATION

Description 12-24V LED Amber Work Light

 Height
 180.34 mm / 7.1 in

 Width
 99.57 mm / 3.92 in

 Depth
 51.05 mm / 2.01 in

Shape Oval

Outer Lens Material Polycarbonate

Outer Lens Color Amber

Housing Material Polycarbonate

Housing Color Black

Mounting Hardware (x1) 5/16"-18 x 1.00" Mounting Bolt

Description

Mounting Type Universal Pedestal Mount

Minimum Operating $-40 \, ^{\circ}\text{C} \, / \, -40 \, ^{\circ}\text{F}$

Temperature

Maximum Operating 65 °C / 149 °F

Temperature

Connector or Wiring Integrated 2-Pin Deutsch Weather-Proof

Socket (DT04-2P)

Mating Connector 2-Pin Deutsch Weather-Proof Plug


(DT06-2S)

Product Weight 0.75 lbs / 0.34 kgs **Shipping Weight** 6.69 lbs / 3.03 kgs





PRODUCT DIMENSIONS

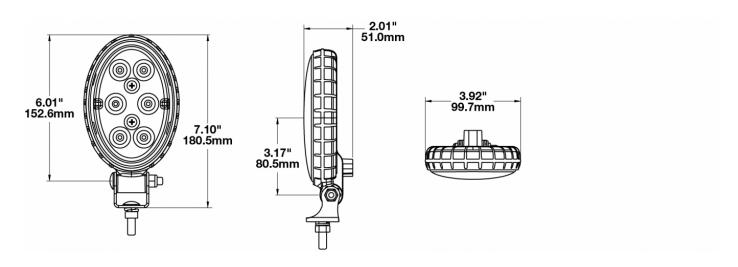

ELECTRICAL SPECIFICATIONS


Input Voltage12-48V DCOperating Voltage10-55V DC

Transient Spike Protection 330V Peak @ 1 HZ-100 Pulses

Red Wire Positive Black Wire Negative

Current Draw 1.00A @ 12V DC

0.48A @ 24V DC 0.33A @ 36V DC 0.25A @ 48V DC



REGULATORY STANDARDS COMPLIANCE









CISPR 22
IEC IP67
Tested to ECE Reg. 10
(Radiated Emissions only)

Buy America Standards

CISPR 12 Eco Friendly SAE J974 UL Recognized

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 900 Effective Lumen 700

Output

Beam Pattern(s) Warning - Flashing Warning

APPLICATIONS



















PRODUCT WARNINGS

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

Print date: 2025-04-29



ACCESSORIES



Part Number 8200011 Magnet Mount Kit for **XD Series Work Lights**



Part Number 8200101 Stainless Steel Mounting Kit for Work Lights & Marine Lights

RELATED PRODUCTS



Part Number 1705911 with Flood Beam Pattern



Part Number 1706171 with Vertical Flood Beam Pattern



Part Number 1706191 12-48V LED Work Light 12-48V LED Work Light 12-48V LED Work Light with Spot Beam Pattern