PRODUCT INFORMATION

Description 12-24V LED Work Light with Flood Beam

Pattern

 Height
 150.37 mm / 5.92 in

 Width
 150.37 mm / 5.92 in

 Depth
 45.97 mm / 1.81 in

Shape Round

Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Polycarbonate

Housing Color Black

Mounting Hardware Panel Mount

Description

Minimum Operating $-40 \, ^{\circ}\text{C} \, / \, -40 \, ^{\circ}\text{F}$

Temperature

Maximum Operating $65 \, ^{\circ}\text{C} \, / \, 149 \, ^{\circ}\text{F}$

Temperature


Connector or Wiring Integrated 2-Pin Deutsch Weather-Proof

Socket (DT04-2P)

Mating ConnectorNone, Bare WiresProduct Weight0.80 lbs / 0.36 kgsShipping Weight0.19 lbs / 0.09 kgs



PRODUCT DIMENSIONS

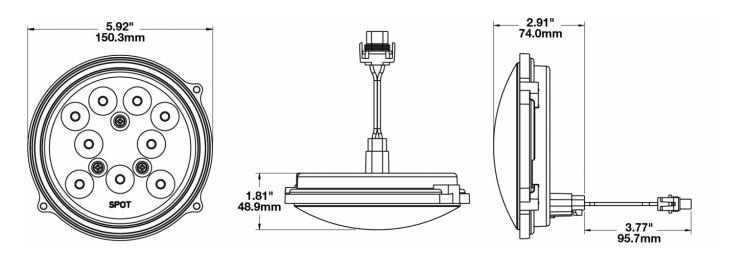

ELECTRICAL SPECIFICATIONS

Input Voltage12-24V DCOperating Voltage10-33V DC

Transient Spike Protection 330V Peak @ 1 HZ-100 Pulses

 Red Wire
 Positive

 Black Wire
 Negative

 Current Draw
 2A @ 12V DC 1A @ 24V DC

REGULATORY STANDARDS COMPLIANCE








Buy America Standards IEC IP69K

Eco Friendly



PHOTOMETRIC SPECIFICATIONS


Raw Lumen Output 2385 **Effective Lumen** 1260

Output

Nominal LED Color

Beam Pattern(s) Forward Lighting - Spot

5000 K **Temperature**

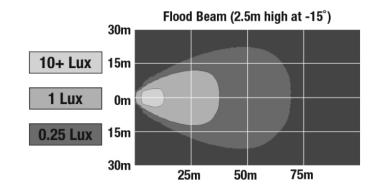

APPLICATIONS





















PRODUCT WARNINGS

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.



RELATED PRODUCTS



Part Number 1501671 with Spot Beam Pattern



Part Number 1501701 12-24V LED Work Light 12-24V LED Work Light with Trapezoid Beam Pattern