


Wig-Wag Module - Model 6170

PRODUCT INFORMATION

Description	12-24V Wig-Wag Module
Height	44.45 mm / 1.75 in
Width	87.88 mm / 3.46 in
Depth	138.18 mm / 5.44 in
Housing Material	ABS
Mounting Type	Low Profile Mount
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	Integrated 12-Pin Deutsch Weather-Proof Socket (DT06-12SA)
Product Weight	1.00 lbs / 0.45 kgs
Shipping Weight	1.13 lbs / 0.51 kgs



PRODUCT DIMENSIONS

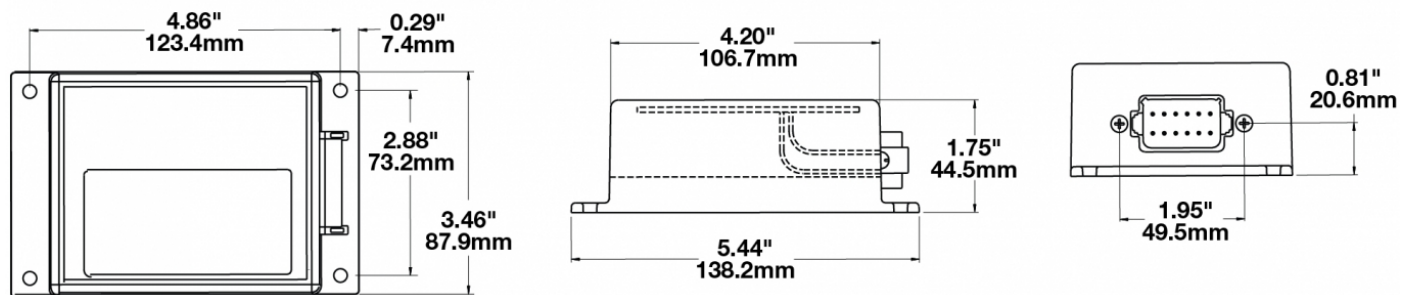

Print date: 2025-04-26

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER®
 Engineered. Lighting. Solutions.

Wig-Wag Module - Model 6170

ELECTRICAL SPECIFICATIONS

Input Voltage 12-24V DC

REGULATORY STANDARDS COMPLIANCE



Buy America Standards

ECE Reg 10

APPLICATIONS





Print date: 2025-04-26

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER®
Engineered. Lighting. Solutions.

Wig-Wag Module - Model 6170

WIRING AND INSTALLATION INFORMATION

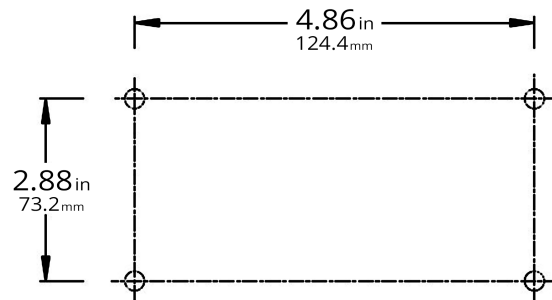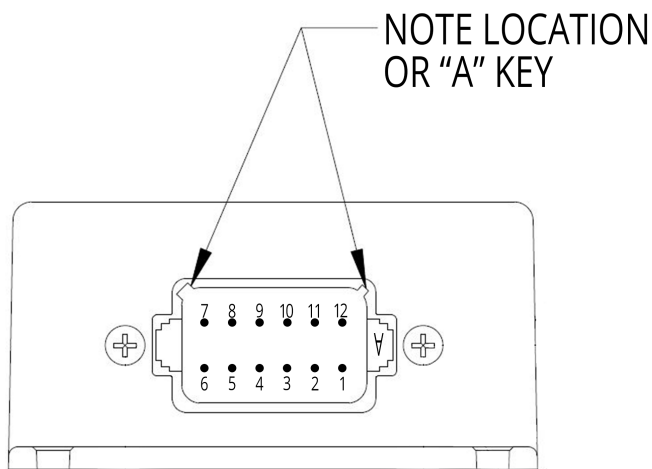

RECOMMENDED MOUNTING HOLES
(NOT TO SCALE)

ASAE MODULE PINOUT	
PIN NUMBER	FUNCTION
1	MARKER LIGHT
2	SELECT INPUT
3	PASS HI BEAM
4	DLR OVERRIDE INPUT
5	DRIVER SIDE HIGH BEAM
6	POWER
7	GROUND
8	LOW BEAM INPUT
9	WIG WAG INPUT
10	HI BEAM
11	N/A
12	N/A

Print date: 2025-04-26

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

Wig-Wag Module - Model 6170

PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

Print date: 2025-04-26

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER®
Engineered. Lighting. Solutions.