

# LED Auxiliary Work Light - Model 4418


## PRODUCT INFORMATION

<b>Description</b>	12V LED Work Light Kit with Trapezoid Beam Pattern - Kit of 2
<b>Height</b>	95.00 mm / 3.74 in
<b>Width</b>	89.00 mm / 3.5 in
<b>Depth</b>	48.00 mm / 1.89 in
<b>Shape</b>	Square
<b>Outer Lens Material</b>	Polycarbonate
<b>Outer Lens Color</b>	Clear
<b>Housing Material</b>	Die-Cast Aluminum
<b>Housing Color</b>	Black
<b>Mounting Hardware Description</b>	(x1) M8-1.25 x 25mm Single Carriage Bolt
<b>Mounting Type</b>	Pedestal
<b>Minimum Operating Temperature</b>	-40 °C / -40 °F
<b>Maximum Operating Temperature</b>	85 °C / 185 °F
<b>Connector or Wiring</b>	Bare Leads
<b>Product Weight</b>	1.87 lbs / 0.85 kgs
<b>Shipping Weight</b>	3.85 lbs / 1.75 kgs



**MODEL**  
**4418**

## PRODUCT DIMENSIONS

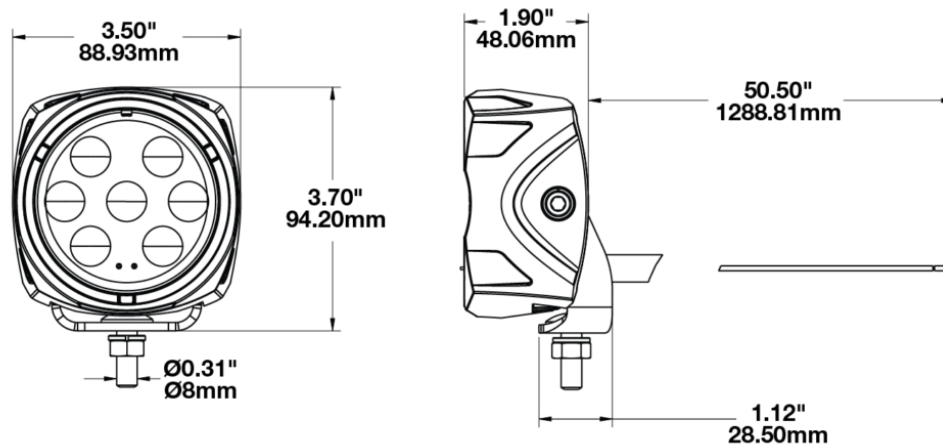

Print date: 2025-04-24

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER®**  
Engineered. Lighting. Solutions.

# LED Auxiliary Work Light - Model 4418

## ELECTRICAL SPECIFICATIONS

<b>Input Voltage</b>	12V DC
<b>Operating Voltage</b>	9-16V DC
<b>Red Wire</b>	Positive
<b>Black Wire</b>	Negative
<b>Current Draw</b>	2.17A @ 9V DC 0.97A @ 16V DC

## REGULATORY STANDARDS COMPLIANCE




Buy America Standards  
IEC IP67

Eco Friendly  
IEC IP69K

## PHOTOMETRIC SPECIFICATIONS

<b>Raw Lumen Output</b>	2,450
<b>Effective Lumen Output</b>	1,300
<b>Nominal LED Color Temperature</b>	5000 K
<b>Beam Pattern(s)</b>	Forward Lighting - Trapezoid

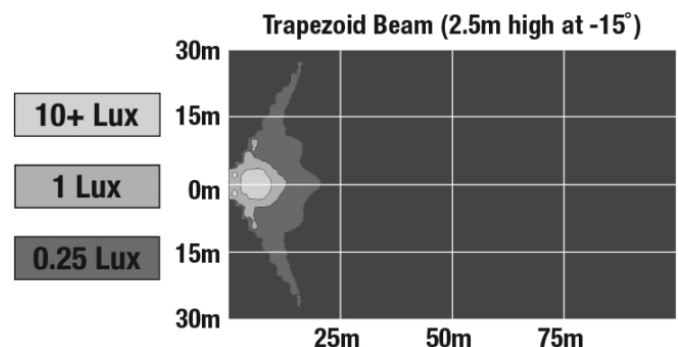

Print date: 2025-04-24

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

# LED Auxiliary Work Light - Model 4418

## APPLICATIONS

---



## ADDITIONAL INFORMATION

---

Each Kit Includes:

- 2 Model 4418 LED Auxiliary Work Lights
- Complete Wiring Kit with:
  - 2-light switch kit with 8 foot relay harness
  - 50 inch extension wires & solder splices for a customized install
  - Illuminated rocker switch for a 13/16 inch mounting hole
  - Weather-tight connectors & a fused battery connection
  - Minimally intrusive switch wire harness for simple install

## PRODUCT WARNINGS

---

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

---

Print date: 2025-04-24

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER®**  
*Engineered. Lighting. Solutions.*

# LED Auxiliary Work Light - Model 4418

## ACCESSORIES

---



**Part Number**  
**6149203**

A-Pillar Mounting Kit  
for Jeep JK

## RELATED PRODUCTS

---



**Part Number**  
**0554861**

12V LED Work Light  
with Spot Beam  
Pattern



**Part Number**  
**0554863**

12V LED Work Light Kit  
with Spot Beam  
Pattern - Kit of 2



**Part Number**  
**0554871**

12V LED Work Light  
with Trapezoid Beam  
Pattern



**Part Number**  
**0555001**

12V LED Work Light  
with Flood Beam  
Pattern



**Part Number**  
**0555003**

12V LED Work Light Kit  
with Flood Beam  
Pattern - Kit of 2