

# LED Stop, Tail, Turn & Backup Lights - Model 260

## PRODUCT INFORMATION

---

<b>Description</b>	12-24V ECE LED Stop, Tail, Turn, Fog, & Backup Light & Clear Lens
<b>Height</b>	51.87 mm / 2.04 in
<b>Width</b>	274.24 mm / 10.8 in
<b>Depth</b>	19.23 mm / 0.76 in
<b>Shape</b>	Stylized
<b>Outer Lens Material</b>	PMMA
<b>Outer Lens Color</b>	Clear
<b>Housing Material</b>	PC+ABS
<b>Housing Color</b>	Black
<b>Bezel Color</b>	NA
<b>Mounting Type</b>	Panel or Pedestal Mount Kit Required
<b>Minimum Operating Temperature</b>	-40 °C / -40 °F
<b>Maximum Operating Temperature</b>	65 °C / 149 °F
<b>Mating Connector</b>	JWS 5743090 Deutch DT04-6P




**Print date: 2025-02-05**

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.  
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660


**J.W. SPEAKER**   
 Engineered. Lighting. Solutions.

# LED Stop, Tail, Turn & Backup Lights - Model 260

## PRODUCT DIMENSIONS

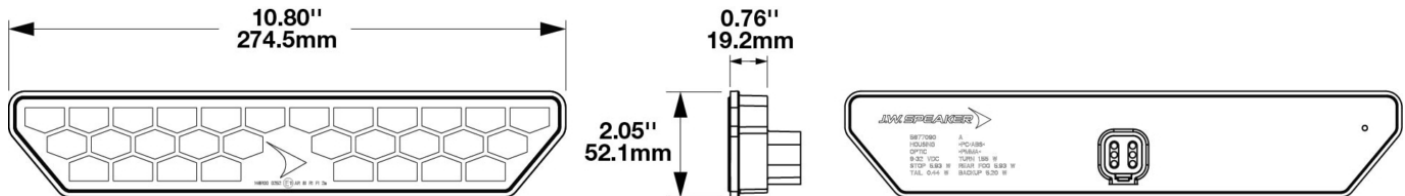

Connector Pin-Out	Light Function	Color
PIN 1	Turn	Grey
PIN 2	Ground	Black
PIN 3	Stop/Fog	Red
PIN 4	Fog/Stop	Yellow
PIN 5	Tail	Blue
PIN 6	Back	Orange

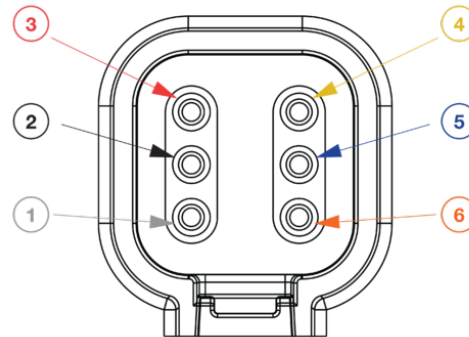

## ELECTRICAL SPECIFICATIONS

<b>Input Voltage</b>	9-30V DC
<b>Operating Voltage</b>	12-24V DC
<b>Current Draw</b>	0.287A @ 13.5V DC (Stop)
	0.088A @ 13.5V DC (Turn)
	0.284A @ 13.5V DC (Fog)
	0.024A @ 13.5V DC (Tail Light)
	0.293A @ 13.5V DC (Backup)
	0.158A @ 27V DC (Stop)
	0.073A @ 27V DC (Turn)
	0.157A @ 27V DC (Fog)
	0.023A @ 27V DC (Tail Light)
	0.176A @ 27V DC (Backup)

Print date: 2025-02-05

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

# LED Stop, Tail, Turn & Backup Lights - Model 260

## REGULATORY STANDARDS COMPLIANCE



ECE Reg 148 - 2a  
ECE Reg 148 - F1  
ECE Reg 148 - S1  
IEC IP69K



IP67



IP69K

ECE Reg 148 - AR  
ECE Reg 148 - R1  
IEC IP67

## PHOTOMETRIC SPECIFICATIONS

**Beam Pattern(s)**      Signalization - Rear Fog  
Signalization - Stop  
Signalization - Tail  
Signalization - Turn (Rear)

## APPLICATIONS



Agriculture



Construction



Industrial



Material



Specialty



Truck & Bus

## PRODUCT WARNINGS

For California residents:

**⚠ WARNING:** Cancer and reproductive harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**⚠ AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Print date: 2025-02-05

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**  
Engineered. Lighting. Solutions.

# LED Stop, Tail, Turn & Backup Lights - Model 260

## ACCESSORIES

---



**Part Number**  
**8200921**  
Pedestal Mount for  
Model 260 SAE and  
905



**Part Number**  
**8200931**  
Panel Mount for Model  
260 SAE and 905



**Part Number**  
**8201051**  
Pedestal Mount for  
Model 260 ECE



**Part Number**  
**8201061**  
Panel Mount for Model  
260 ECE

## RELATED PRODUCTS

---



**Part Number**  
**0347951**  
12-24V DOT/SAE LED  
Stop & Tail Light &  
Red Lens