## LED Work & Backup Lights - Model 905

#### PRODUCT INFORMATION

**Description** 12-24V LED Work Light with Flood

Beam Pattern & Diffused Lens

 Height
 52.00 mm / 2.05 in

 Width
 274.40 mm / 10.8 in

 Depth
 28.70 mm / 1.13 in

Shape Stylized

Outer Lens Material ACRYLIC

Outer Lens Color CLEAR

Housing Material PC/ABS

Housing Color BLACK


Bezel Color NA

Product Weight 0.41 lbs / 0.19 kgs
Shipping Weight 4.48 lbs / 2.03 kgs





#### **PRODUCT DIMENSIONS**



#### **ELECTRICAL SPECIFICATIONS**

Input Voltage 12-24V DC
Operating Voltage 9-32V DC
Red Wire Power (+)
Black Wire Ground (-)

Current Draw 1.32A @ 12V DC (Worklamp)

0.64A @ 24V DC (Worklamp)

Print date: 2025-03-28

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A. www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660



# LED Work & Backup Lights - Model 905

#### REGULATORY STANDARDS COMPLIANCE



IEC IP67

#### PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 2800 Effective Lumen 1160


Output

Candela Output 770 Nominal LED Color 4750 K

Temperature

**Beam Pattern(s)** Forward Lighting - Flood

(Standard)

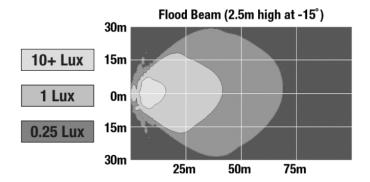

#### **APPLICATIONS**













#### **PRODUCT WARNINGS**

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - <a href="www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>.



# LED Work & Backup Lights - Model 905

#### **ACCESSORIES**





### Part Number 8200921

Pedestal Mount for Model 260 SAE and 905

### Part Number 8200931

Panel Mount for Model 260 SAE and 905

#### **RELATED PRODUCTS**





### Part Number 0443601

12-24V LED Backup & Work Light with Flood Beam Pattern

### **Part Number 1000161**

12-24V LED Work Light with Flood Beam Pattern

