PRODUCT INFORMATION

Description 24V DOT LED Heated Headlight - 2

Light Kit

Height 94.53 mm / 3.72 in Width 291.58 mm / 11.48 in **Depth** 133.17 mm / 5.24 in

Rectangular **Shape Outer Lens Material** Polycarbonate

Outer Lens Color Clear **Housing Material** Xenoy **Housing Color** Black **Bezel Color** Black

Mounting Hardware (x4) M8-1.25 x 25 mm OR (x2) 1/2"-13

Description x 1.75" SS Carraige Bolt **Mounting Type** Universal Pedestal Mount

Retrofits Pedestal Mount Snow Plow Lights

Mating Connector Delphi (#12052848) **Product Weight** 9.06 lbs / 4.11 kgs **Shipping Weight** 10.21 lbs / 4.63 kgs











PRODUCT DIMENSIONS







ELECTRICAL SPECIFICATIONS

Input Voltage24V DCOperating Voltage20-32V DCRed WireFront PositionBlack WireGroundWhite WireHigh BeamYellow WireTurn

Blue Wire Non-Functioning
Orange Wire Low Beam

Current Draw 1.20A @ 24V DC (Low Beam)

1.60A @ 24V DC (High Beam) 0.27A @ 24V DC (Turn Signal)

0.03A @ 24V DC (DRL)

REGULATORY STANDARDS COMPLIANCE










Buy America Standards Eco Friendly

FMVSS 108 s10.1 (Table XIX) FMVSS 108 s10.1 (Table XVIII) FMVSS 108 s7.1 (Table VI) FMVSS 108 s7.8 (Table XIV)



PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 2,880 (High Beam); 2,160 (Low

Beam)

Effective Lumen 1,150 (High Beam); 800 (Low

Output Beam)

Nominal LED Color 5000 K

Temperature


Beam Pattern(s) Forward Lighting - High Beam

(DOT/ECE)

Forward Lighting - Low Beam

(DOT)

Signalization - Turn (Front)

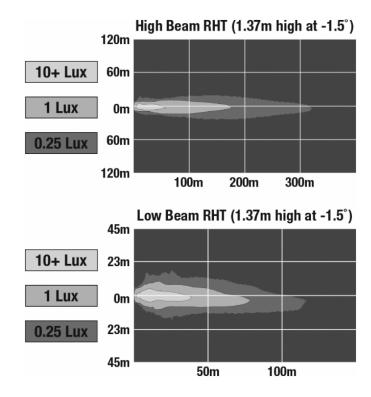

APPLICATIONS















INSTALLATION & APPLICATION INFORMATION

Pedestal mount snow plow lights for single or double bolt mounts. Each lamp comes with mounting hardware for single bolt mount included ($1/2-13 \times 1.75$ SS Carriage Bolt with hex nut and washer), in addition to the 2 M8-1.25 x 25 SS Carriage Bolts for double bolt mounts.

ADDITIONAL INFORMATION

J.W. Speaker's Model 9800 is best suited for normal snow plowing, not "high speed" plowing on highways. Consult with your J.W. Speaker salesperson for more information.

The Model 9800 is not designed to be a plug and play for Boss snow plows. If you have a Boss snow plow please see your local Boss dealer for information on the right product to use.

Lamp design integrates acceptance of mating connector Delphi #1205848

SMARTHEAT™ HEATING SYSTEM

The SmartHeat[™] heating system senses ambient temperature and turns the integrated heating system in the lens on & off. This system actually clears ice & snow twice as fast as conventional halogen lamps.

When does the heater turn on?

Heater turns on or off according to temperature changes and vehicle power:

- · Heater will turn on when temperatures drop, generating enough heat to prevent ice build-up.
- Heater will turn on when powering up, de-icing the light as rapidly as possible.

When does the heater turn off?

Heater will turn off when it senses temperatures increase and are above the high temperature threshold.

Learn more about this technology <u>here</u>.

See Additional Information on page 1 for heated wire installation

PRODUCT WARNINGS

For California residents:

▲ **WARNING:** Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>.

▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.



RELATED PRODUCTS



Part Number 0550061 12-24V DOT LED No

12-24V DOT LED Non-Heated Headlight - 2 Light Kit



<u>Part Number</u> <u>0550161</u>

12-24V ECE LED RHT Non-Heated Headlight - 2 Light Kit



Part Number 0550171

12-24V ECE LED LHT Non-Heated Headlight - 2 Light Kit



Part Number 0551833

24V ECE LED RHT Heated Headlight - 2 Light Kit





Part Number 0551863

24V ECE LED LHT Heated Headlight - 2 Light Kit





<u>Part Number</u> <u>0552243</u>

12V DOT LED Heated Headlight - 2 Light Kit





Part Number 0552423

12V ECE LED RHT Heated Headlight - 2 Light Kit





Part Number 0552433

12V ECE LED LHT Heated Headlight - 2 Light Kit

